


DS-2TM06-LF/AN

Thermal Network Camera Module

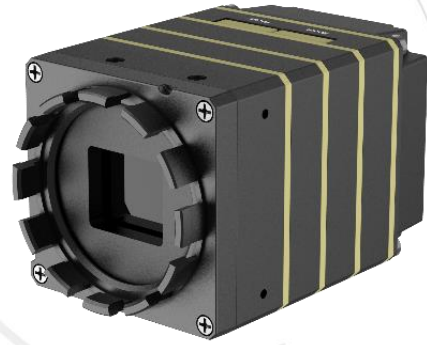

Key Feature

- 640 × 512 resolution, high sensitivity sensor.
- NETD ≤ 35 mk (@25 °C, F# = 1.0)
- Auto focus and gray scale alarm
- Network connection, supports variable image adjustment
- 15 mm, 25 mm, 50 mm, 75 mm, 20-100 mm, 30-150 mm lens are selectable
- Supports RS-485, PELCO-D protocol
- Supports RJ45 Ethernet interface
- Compact size and low consumption



Specification


Thermal Module	
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Max. Resolution	640 × 512
Pixel Interval	17μm
Response Waveband	8 μm to 14 μm
Frame Rate	50 fps
NETD (Noise Equivalent Temperature Difference)	≤ 35 mk (@25 °C, F# = 1.0)
Image	
NUC (Nonuniformity Correction)	Yes
Correction	Auto Correction, Scheduled Correction, Manual Background Correction
Brightness & Contrast Adjustment	Yes
Palettes	15 Palettes of Color Adjustable, Default White Hot
AGC	Auto, Manual
DPC	Yes
DDE	Yes
3D DNR	Yes
Digital Zoom	1x, 2x, 4x, 8x
Digital Video Output	Yes
Analog Video Output	CVBS
Burning Prevention	Manual, Auto
Focus and Zoom	
Focus	Manual, Auto
Zoom	Manual
Auto Focus Duration	<5 s
Gray Scale Alarm	
Alarm Method	Protocol uploaded to I/O interface
Alarm Threshold	Adjustable
Alarm Action Duration	<0.2 s
Network & Interface	
Main Stream	25 fps (640 × 512)
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE
Application Programming	Open-ended API, support PSIA, CGI, open network video interface, HIKVISION SDK and third-party management platform
Interface	1, CVBS cable 1, RJ45 10M/100M self-adaptive Ethernet interface. 1, RS-485 interface

Storage	TF card
Alarm	1-ch input, 1-ch output
Video Compression	H.265/H.264/MJPEG
User/Host Level	Up to 32 users, 3 levels: Administrator, Operator, User
Security Measures	User authentication (ID and PW), HTTPS encryption, IEEE 802.1x access control, IP address filtering
Web Browser	IE 10-11, Chrome 41-44, Firefox 30-51
General	
Power	5 VDC-12 VDC
Power Consumption	< 2.2 W (with zoom and focus off)
Working Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Working Humidity	< 90%
Storage Temperature	-45 °C to 85 °C (-49 °F to 185 °F)
Lens Mount	M34 × 0.75 mm , Customized
Dimension	40 mm × 41 mm × 65 mm (1.57" × 1.61" × 2.56")
Weight	< 111 g (0.24 lb)
Accessory	Cable ×2, Socket ×1, CD ×1

Available Model

DS-2TM06-LF/AN

Dimension

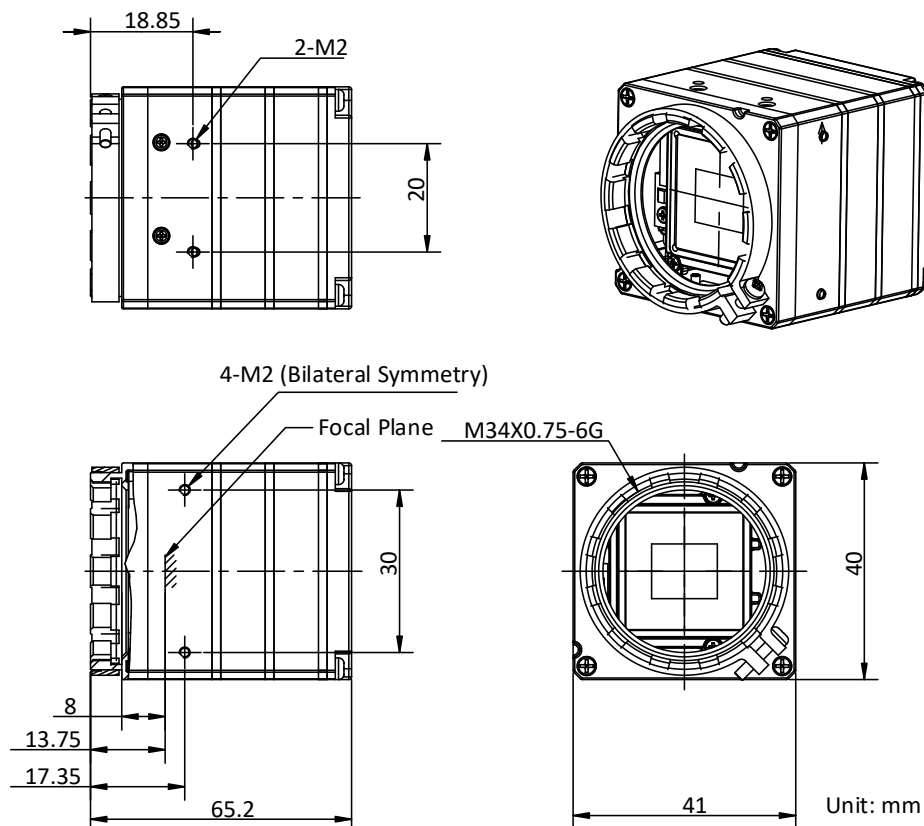

COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-[0]31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com