

DS-TP50-16E

Terminal Server

HIKVISION[®]



Introduction

DS-TP50-16E is an outdoor management terminal server in intelligent traffic domain, supporting video management, traffic data management, video/audio decoding, picture processing, and network transmission, etc. Integrated with 16-port switch design and uploading fiber interface, the device not only meets the distributed storage demands, but also can build a strong security surveillance system after accessing to the platform with network.

DS-TP50-16E can be connected to 16 network cameras. It is embedded with 4 SATA interfaces, each of which can be plugged with 6TB HDD.

DS-TP50-16E is widely applied to checkpoint system, intersection violation system and traffic surveillance system.

Key Feature

- Up to 16 cameras can be connected for video/audio storage, picture saving and uploading.
- Supports OSD function and image composition function.
- Convenient HDD design for easy installation/uninstallation and maintenance.
- Low power consumption design, and the working temperature is from -40°C to 70°C.
- Audio alarm is triggered when opening the cabinet door, and the alarm will be uploaded to the center.
- (Optional) Equipped with GPS module.
- At least 2 remote hosts and 2 FTP hosts can be linked for data uploading.
- Web operation is supported.
- SDK


Available Model

DS-TP50-16E

Specification

System	
Processor	High-performance ARM A17 processor
Operating System	Embedded Linux operating system
Operating GUI	WEB
HDD Storage	4 x SATA (Each SATA interface supports up to 6TB HDD.)
RESET	1 x RESET button
Indicator	4 x indicator (1 x Power Indicator, 1 x Alarm Indicator, 1 x HDD Indicator, 1 x Ready Indicator)
Interface	
Network Interface	16 x 1000 M Ethernet interface, 1 x internal 10/100/1000 M self-adaptive Ethernet interface, 1 x external 10/100/1000 M self-adaptive Ethernet interface, 1 x internal 1000 M fiber interface, 1 x external 1000 M fiber interface
Audio Input	1
Audio Output	1
Alarm Input	2
Alarm Output	2
RS-232 Interface	2
RS-485 Interface	2
USB	1
Function	
Data Storage	Vehicle information (passing records and pictures) storage
Video Recording	Video recording function. Recording duration is determined by the stream size and the HDD capacity.
Data Uploading	ANPR and manual uploading
Network Settings	Able to set two-segment IP address
General	
Working Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Working Humidity	10% to 90%
Power Supply	12 VDC/12.5 A
Dimension (L x W x H)	370 x 273 x 102.5 mm (14.6 x 10.7 x 4.03 inch)

Typical Application

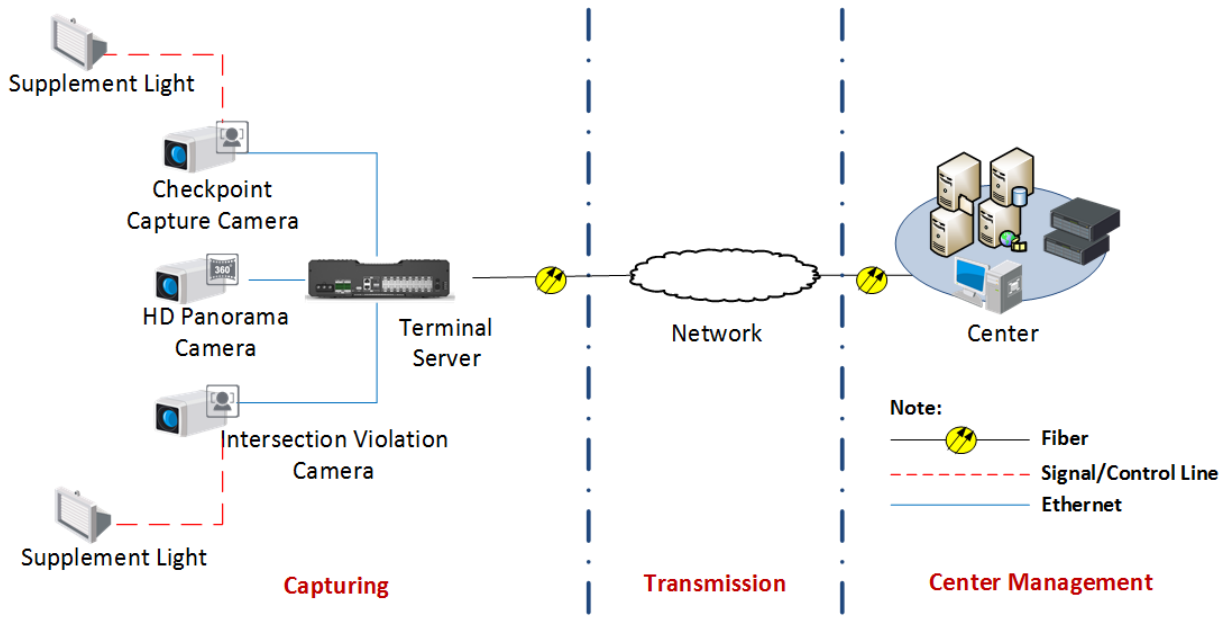

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Australia
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision India
 T +91-22-28469900
 sales@pramahikvision.com

Hikvision Canada
 T +1-866-200-6690
 sales.canada@hikvision.com

Hikvision Thailand
 T +662-275-9949
 sales.thailand@hikvision.com

Hikvision Europe
 T +31-23-5542770
 sales.eu@hikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
 Latam.support@hikvision.com

Hikvision Turkey
 T +90 (216)521 7070- 7074
 sales.tr@hikvision.com

Hikvision Malaysia
 T +601-7652-2413
 sales.my@hikvision.com

Hikvision UK & Ireland
 T +01628-902140
 sales.uk@hikvision.com

Hikvision South Africa
 Tel: +27 (10) 0351172
 sale.africa@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
 info.fr@hikvision.com

Hikvision Kazakhstan
 T +7-727-9730667
 nikia.panfilov@hikvision.ru

Hikvision Vietnam
 T +84-974270888
 sales.vt@hikvision.com

Hikvision UAE
 T +971-4-4432090
 salesme@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Tashkent
 T +99-87-1238-9438
 uzb@hikvision.ru

Hikvision Hong Kong
 T +852-2151-1761
 info.hk@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
 saleru@hikvision.com

Hikvision Korea
 T +82-(0)31-731-8817
 sales.korea@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 info.pl@hikvision.com

Hikvision Indonesia
 T +62-21-2933759
 Sales.Indonesia@hikvision.com

Hikvision Colombia
 sales.colombia@hikvision.com